

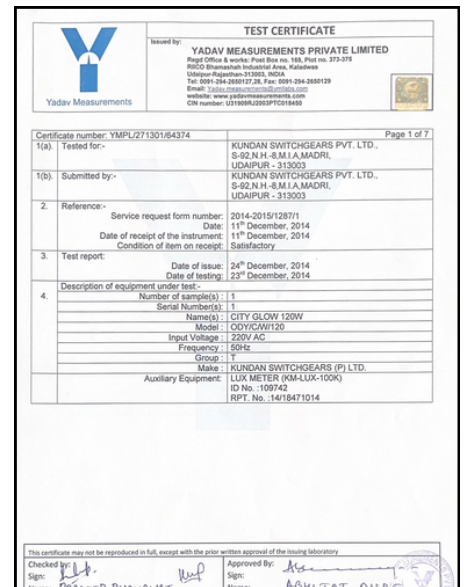


# LIGHTING PRODUCTS

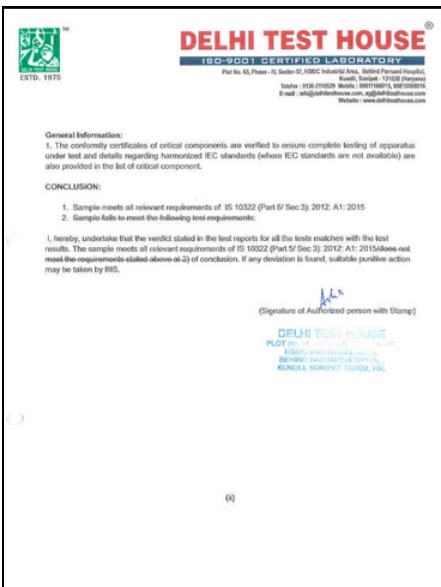

# Convergence of Innovation

Kundan Switchgears Pvt. Ltd. engaged in manufacturing of LED lights and its accessories such as LED light drivers, LED light housing and components for switchgears and electronics industries etc. since 1992 under the brand name of "ODYSSEY"®

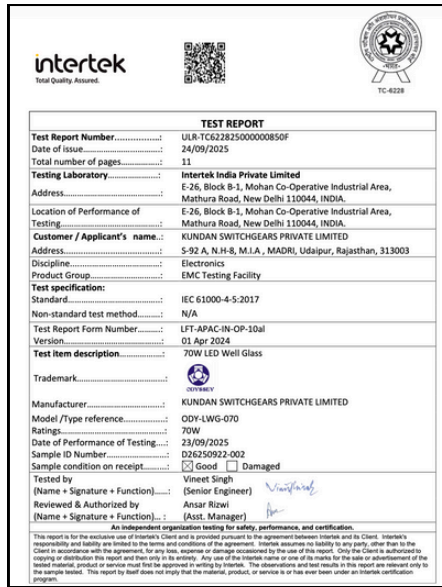

Over the years, we have integrated multiple disciplines—including mould design, mould manufacturing, electronics production, and mass manufacturing—into developing our own lighting products.

This approach has allowed us to build a strong foundation in delivering innovative lighting solutions to our partners while consistently achieving outstanding results.

At Odyssey, our deep product understanding empowers us to create unique, customised solutions tailored to specific needs. Just as LED technology fosters sustainability, we strive to balance customer requirements with environmental responsibility, ensuring a sustainable approach to lighting.

# Industrial & Outdoor Range



- High bay / UFO light
- Well glass Light
- Flood Light
- Street Light
- Linear Light
- Canopy Light
- DOB Floodlight
- Oak Streetlight
- 24V AC Floodlight
- Stadium Light
- PC Streetlight
- Dolphin Streetlight
- Lens Streetlight
- Sensor UFO light
- RGB Floodlight


\*All pictures shown are for illustration purpose only, actual product may vary

\*Customize specifications are acceptable, features/Specifications/Pictures are subject to change without any prior notice

\*Not all products showcased in the catalogue may be available. Actual specifications may vary slightly from the description. Kindly contact Sales Team for stock information and delivery date.

## High bay / UFO Light

G2



LED Type - 2835  
Beam Angle - 70°  
Optics Type - Spiral Lens

LHB-080-A	LHB-100-A	LHB-120-A	LHB-150-A	LHB-200-A	LHB-250-A
80W	100W	120W	150W	200W	250W
8800 lum	11000 lum	13200 lum	16500 lum	22000 lum	27500 lum
4KV Internal Surge Protection					



G2



LED Type - 5050  
Beam Angle - 90°  
Optics Type - Bubble Lens

LHB-080-B	LHB-100-B	LHB-120-B	LHB-150-B	LHB-200-B
80W	100W	120W	150W	200W
9600 lum	12000 lum	14400 lum	18000 lum	24000 lum
4KV Internal + 10KV Surge Protection				

G2

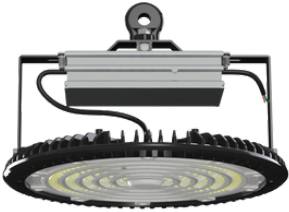

LED Type - 5050  
Beam Angle - 70°  
Optics Type - Spiral Lens

LHB-080-C	LHB-100-C	LHB-120-C	LHB-150-C	LHB-200-C	LHB-240-C
80W	100W	120W	150W	200W	240W
11600 lum	14500 lum	17400 lum	21750 lum	29000 lum	34800 lum
4KV Internal + 10KV Surge Protection					


G2



LED Type - 5050  
Beam Angle - 90°  
Optics Type - Bubble Lens

LHB-080-D	LHB-100-D	LHB-120-D	LHB-150-D	LHB-200-D
80W	100W	120W	150W	200W
9600 lum	12000 lum	14400 lum	18000 lum	24000 lum
4KV Internal + 10KV Surge Protection				


G1

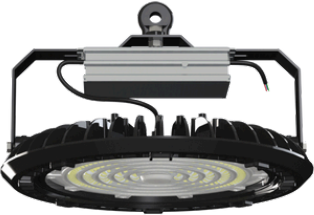

Beam Angle - 70°  
LED Type - 5050  
Optics Type - Spiral

LHB-080-E	LHB-100-E	LHB-120-E	LHB-150-E	LHB-200-E	LHB-240-E
80W	100W	120W	150W	200W	240W
11600 lum	14500 lum	17400 lum	21750 lum	29000 lum	34800 lum
4KV Internal + 10KV Surge Protection					

G1

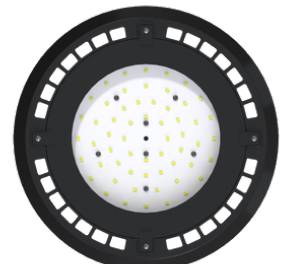

Beam Angle - 120°  
Lens Type - Glass

LHB-080-F	LHB-100-F	LHB-120-F	LHB-150-F	LHB-200-F
80W	100W	120W	150W	200W
9200 lum	11500 lum	13800 lum	17250 lum	23000 lum
4KV Internal + 10KV Surge Protection				

### Accessories



I-Bolt



Safety Rope

.....

.....

.....

.....

.....

For Customization needs !!



Visit

[www.kundanswitchgears.com/contact-us](http://www.kundanswitchgears.com/contact-us)

## Well Glass Light


G2



Beam Angle - 120°  
Optics Type - Clear Dome

30W LWG-030-A  
40W LWG-040-A  
45W LWG-045-A

G2

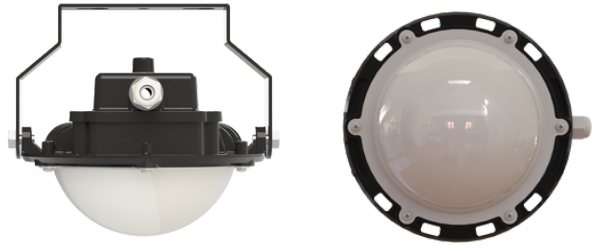

Beam Angle - 120°  
Optics Type - Milky Dome

30W LWG-030-B  
40W LWG-040-B  
45W LWG-045-B

G1



Beam Angle - 120°  
Optics Type - Clear Dome

60W LWG-060-C  
70W LWG-070-C  
80W LWG-080-C


G1



Beam Angle - 120°  
Optics Type - Milky Dome

60W LWG-060-D  
70W LWG-070-D  
80W LWG-080-D

G1

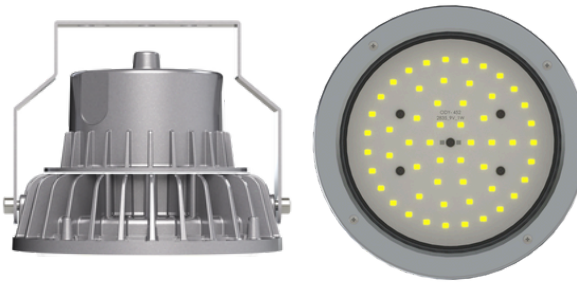

Beam Angle - 120°  
Optics Type - Glass

60W LWG-060-E  
70W LWG-070-E  
80W LWG-080-E

Canopy Light



Lens Type - Glass

80W LCL-080

### Accessories



I-Bolt

SPD Cable

.....

.....

.....

.....

For Customization needs !!



Visit

[www.kundanswitchgears.com/contact-us](http://www.kundanswitchgears.com/contact-us)

## Flood Light


### DOB Floodlights



Beam Angle - 36° / 46°

LFL-050-A	LFL-100-A	LFL-150-A	LFL-200-A
50W	100W	150W	200
5000 lum	10000 lum	15000 lum	20000 lum
4KV Internal Surge Protection			


### Optima Floodlight

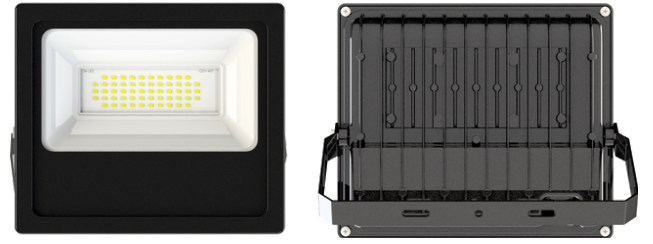

Beam Angle - 120°

LFL-030-B	LFL-050-B	LFL-100-B	LFL-150-B	LFL-200-B	LFL-250-B
30W	50W	100W	150W	200W	250W
3200 lum	5200 lum	10500 lum	15750 lum	21000 lum	26250 lum
4KV Internal Surge Protection					


### Optima Floodlight Lens



Beam Angle - 90°

LFL-100-C	LFL-150-C	LFL-200-C	LFL-250-C
100W	150W	200W	250W
10500 lum	15750 lum	21000 lum	26250 lum
4KV Internal Surge Protection			

### Optima Floodlight Lens

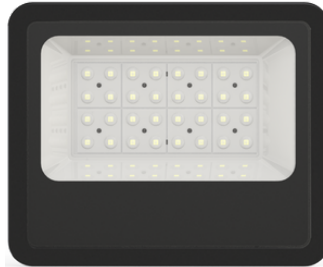

Beam Angle - 90°

LFL-050-D	LFL-100-D	LFL-150-D	LFL-200-D	LFL-250-D
50W	100W	150W	200W	250W
6000 lum	12000 lum	18000 lum	24000 lum	30000 lum
4KV Internal Surge Protection + 10KV				

### 24V AC optima floodlight



Input Current - 2.08A / 4.16A  
Input Voltage - 22-26VAC

50W LFL-050-E  
100W LFL-100-E



## Linear Light

100W



**LLL-100**

Beam Angle - 20° / 60° / 90°  
6KV Internal Surge Protection

200W



**LLL-200**

Beam Angle - 20° / 60° / 90°  
6KV Internal Surge Protection

300W



**LLL-300**

Beam Angle - 20° / 60° / 90°  
6KV Internal Surge Protection

400W



**LLL-400**

Beam Angle - 20° / 60° / 90°  
6KV Internal Surge Protection

### Accessories



SPD Cable

.....

.....

.....

.....

.....

For Customization needs !!



Visit

[www.kundanswitchgears.com/contact-us](http://www.kundanswitchgears.com/contact-us)

## Street Light

### Frame Streetlight



IP66 2 YEARS WARRANTY

Beam Angle - 120°  
4KV Internal Surge Protection

LSL-040-A	LSL-060-A	LSL-100-A	LSL-120-A	LSL-150-A	LSL-200-A	LSL-250-A
40W	60W	100W	120W	150W	200W	250W
43mm	46mm	54mm	60mm	60mm	64mm	64mm
4400 lum	6600 lum	11000 lum	13200 lum	16500 lum	22000 lum	27500 lum

### Frame Streetlight



IP66 3 YEAR WARRANTY

Type - II Lens  
6KV Internal Surge Protection

LSL-040-B	LSL-060-B	LSL-100-B	LSL-120-B	LSL-150-B	LSL-200-B	LSL-250-B
40W	60W	100W	120W	150W	200W	250W
43mm	46mm	54mm	60mm	60mm	64mm	64mm
4200 lum	6300 lum	10500 lum	12600 lum	15750 lum	21000 lum	26250 lum

### Oak Streetlight



IP66 2 YEARS WARRANTY

6KV Internal Surge Protection  
Beam Angle - 120°

OSL-045-C	OSL-060-C	OSL-075-C	OSL-150-C
45W	60W	75W	150W
37mm	54mm	54mm	60mm
5600 Lum	7500 lum	9200 lum	18000 lum

### Oak Lens Streetlight



IP66 2 YEARS WARRANTY

6KV Internal Surge Protection  
Beam Angle - 45° Type - II lens

OSL-045-D	OSL-060-D	OSL-075-D	OSL-150-D
45W	60W	75W	150W
37mm	54mm	54mm	60mm
5200 Lum	7000 lum	8400 lum	17300 lum

### Optima



IP66 2 YEARS WARRANTY

4KV Internal Surge Protection

OLSL-020-E	OLSL-040-E	OLSL-060-E
20W	40W	60W
40mm	43mm	46mm
2100 lum	4300 lum	6500 lum

### Dolphin G2



IP66 2 YEARS WARRANTY

LDL-045-F	LDL-045-G	LDL-060-F	LDL-060-G
45W	45W	60W	60W
5000 Lum	5000 Lum	6600 Lum	6600 Lum
-	LDR Sensor	-	LDR Sensor
4KV Internal Surge Protection			

### Dolphin G1



IP66 2 YEARS WARRANTY

Beam Angle - 45°- 120° Type - II lens

LDL-025-H	LDL-045-H	LDL-080-H
25W	45W	80W
3000 lum	5200 lum	9300 lum
4KV Internal Surge Protection		

### Accessories



SPD Cable

.....

.....

.....

.....

.....

For Customization needs !!



Visit

[www.kundanswitchgears.com/contact-us](http://www.kundanswitchgears.com/contact-us)

## Street Light

### ECO Streetlight



Asymmetric Lens  
4KV Internal Surge Protection

ESL-024-I	ESL-036-I	ESL-050-I	ESL-060-I	ESL-090-I	ESL-120-I
24W	36W	50W	60W	90W	120W
2400 lum	3600 lum	5000 lum	6000 lum	9000 lum	12000 lum

### Super Eco streetlight



Asymmetric Lens  
4KV Internal Surge Protection

SESL-024-J	SESL-036-J	SESL-050-J	SESL-100-J
24W	36W	50W	100W
2400 lum	3600 lum	5000 lum	10000 lum

### PC Streetlight



PC Cover  
40mm Pole Dia  
16W SLP-016-K



## Special Projects

# DAY LIGHT SENSOR

Streetlight equipped with day light sensor



Day light sensor



Energy Saving



Plug and play  
no extra installation  
required



4-10Kv Surge  
In different models



5 lux -  
25 lux



IP 66  
Rated



In - Build  
Sensor



Robust  
Driver

### Accessories



SPD Cable

.....

.....

.....

.....

.....

For Customization needs !!




Visit

[www.kundanswitchgears.com/contact-us](http://www.kundanswitchgears.com/contact-us)

# SENSOR HIGHBAY

A Microwave Motions sensor highbay with day light function

5 YEARS WARRANTY



Auto On Off Dimmable



4-13m Detection Range



3 Sec to 30 mins



5 lux - 300Lux



IP 65 Rated





0 Sec - Infinity



Remote controller

LHB-080-G	LHB-100-G	LHB-120-G	LHB-150-G	LHB-200-G	LHB-240-G
80W	100W	120W	150W	200W	240W
11600 lum	14500 lum	17400 lum	21750 lum	29000 lum	34800 lum
4KV Internal + 10KV Surge Protection					

LED Type - 5050  
Beam Angle - 70°  
Optics Type - Spiral

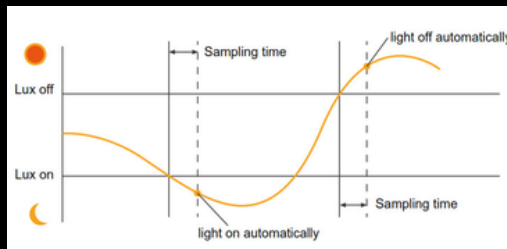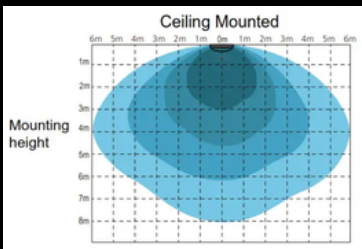

## Accessories



I-Bolt



Safety Rope

.....

.....

.....

.....

.....

For Customization needs !!



Visit

[www.kundanswitchgears.com/contact-us](http://www.kundanswitchgears.com/contact-us)

# Architectural range



- COB light
- Downlight
- Surface light
- Pop out light
- Pullout light
- Wall lights
- Laser light
- Wall washer
- AI Profile
- Silicon Profile
- Multi light
- Track light
- Strip light
- Magnetic light
- Panel light

\*All pictures shown are for illustration purpose only, actual product may vary

\*Customize specifications are acceptable, features/Specifications/Pictures are subject to change without any prior notice

\*Not all products showcased in the catalogue may be available. Actual specifications may vary slightly from the description. Kindly contact Sales Team for stock information and delivery date.

### Canary Light



Smart control

Wattages - 12W / 18W / 24W  
Color Temp - WW / NW / CW  
Beam Angle - 120°  
Cutout - 110mm / 138mm / 160mm  
Height - 50mm / 50mm / 50mm  
Body Color - White / Black  
Material - ADC12

### Uni COB



Smart control

Wattages - 7W / 12W / 18W  
Color Temp - WW / NW / CW  
Beam Angle - 36°  
Cutout - 55mm / 75mm / 95mm  
Height - 59mm / 85mm / 105mm  
Body Color - White / Black  
Finish -White / Matt Black / Gold  
Gun Black / Chrome

### Blaze COB



Smart control

Wattages - 7W / 12W / 18W  
Color Temp - WW / NW / CW  
Beam Angle - 36°  
Cutout - 55mm / 75mm / 85mm  
Height - 65mm / 75mm / 100mm  
Body Color - White / Black

### Shimmer COB



Smart control

Wattages - 4W / 7W / 12W  
Color Temp - WW / NW / CW  
Beam Angle - 36°/28°  
Cutout - 28mm / 35mm / 55mm  
Height - 28mm / 52mm / 63mm  
Body Color - White / Black / Grey  
Material - ADC12

### Darrow COB



Smart control

Wattages - 7W / 12W / 24W  
Color Temp - WW / NW / CW  
Beam Angle - 36°  
Cutout - 55mm / 75mm / 95mm  
Height - 78mm / 96mm / 121mm  
Body Color - White / Black  
Finish -White / Matt Black / Gold  
Gun Black / Chrome

### Darrow Lite COB



Smart control Detachable\*

Wattages - 7W / 12W / 18W  
Color Temp - WW / NW / CW  
Beam Angle - 36°  
Cutout - 55mm / 75mm / 85mm  
Height - 70mm / 85mm / 108mm  
Body Color - White / Black  
Finish -White / Matt Black / Gold  
Gun Black / Chrome

### Darrow Slim COB



Smart control

Wattages - 7W / 12W / 18W  
Color Temp - WW / NW / CW  
Beam Angle - 36°  
Cutout - 55mm / 75mm / 85mm  
Height - 59mm / 85mm / 105mm  
Body Color - White / Black  
Finish -White / Matt Black / Gold  
Gun Black / Chrome

### Surface Pro COB



Smart control

Wattages - 7W / 12W / 18W  
Color Temp - WW / NW / CW  
Beam Angle - 36°  
Cutout - N.A  
Height - 72mm / 82mm / 95mm  
Body Color - White / Black  
Finish -White / Matt Black / Gold  
Gun Black / Chrome


### Surface R COB



Smart control

Wattages - 7W / 12W / 18W  
Color Temp - WW / NW / CW  
Beam Angle - 36°  
Cutout - N.A  
Height - 70mm / 85mm / 100mm  
Body Color - White / Black  
Finish -White / Matt Black / Gold  
Shiny Black / Chrome / Rose gold

### Spark COB



Smart control

Wattages - 7W / 12W / 18W  
Color Temp - WW / NW / CW  
Beam Angle - 36°  
Cutout - 65mm / 80mm / 90mm  
Height - 65mm / 70mm / 100mm  
Body Color - Copper / Shiny black  
OD - 70mm / 85mm / 95mm

### Delta COB



Smart control

Wattages - 7W / 12W / 18W  
Color Temp - WW / NW / CW  
Beam Angle - 36°  
Cutout - 55mm / 75mm / 85mm  
Height - 65mm / 75mm / 100mm  
Body Color - White / Black  
Finish -White / Matt Black / Gold  
Shiny Black / Chrome / Rose Gold

### Blaze Lens COB



Smart control

Wattages - 7W / 12W / 18W  
Color Temp - WW / NW / CW  
Beam Angle - 36°  
Cutout - 55mm / 75mm / 85mm  
Height - 65mm / 70mm / 100mm  
Body Color - White / Black

### Blaze Tilt COB



Smart control

Wattages - 3W / 12W / 18W  
Color Temp - WW / NW / CW  
Beam Angle - 36°/45°  
Cutout - 55mm / 80mm / 100mm  
Height - 35mm / 40mm / 50mm  
Body Color - White / Black

### Curvy COB



Smart control

Wattages - 7W / 12W / 18W  
Color Temp - WW / NW / CW  
Beam Angle - 45°  
Cutout - 60mm / 75mm / 90mm  
Height - 60mm / 60mm / 65mm  
Body Color - White / Black  
Finish -White / Matt Black / Gold  
Shiny Black / Chrome / Rose Gold

### Darrow Trimless COB



Smart control Detachable\*

Wattages - 7W / 12W / 18W  
Color Temp - WW / NW / CW  
Beam Angle - 36°  
Cutout - 55mm / 75mm / 95mm  
Height - 78mm / 96mm / 121mm  
Body Color - White / Black  
Finish -White / Matt Black / Gold  
Gun Black / Chrome

### Darrow SQ COB



Smart control

Wattages - 7W / 12W / 18W  
Color Temp - WW / NW / CW  
Beam Angle - 36°  
Cutout - 55mm / 75mm / 95mm  
Height - 78mm / 96mm / 121mm  
Body Color - White / Black  
Finish -White / Matt Black / Gold  
Gun Black / Chrome

### Darrow Tall COB



Smart control

Wattages - 15W / 24W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36°  
 Cutout - 55mm / 85mm  
 Height - 112mm / 145mm  
 Body Color - White / Black  
 Finish -White / Matt Black / Gold  
 Gun Black / Chrome

### Haze COB



Smart control

Wattages - 7W / 12W / 18W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36°  
 Cutout - 35mm / 45mm / 55mm  
 Height - 82mm / 106mm / 112mm  
 Body Color - White / Black  
 Finish -White / Matt Black / Gun Black

### Fit COB



Smart control

Wattages - 7W / 12W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36°  
 Cutout - 55mm / 75mm  
 Height - 75mm / 81mm  
 Body Color - White / Black  
 Finish -White / Matt Black / Gold  
 Gun Black / Chrome

### Flare COB



Smart control

Wattages - 12W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36°  
 Cutout - 75mm  
 Height - 75mm  
 Body Color - White / Black  
 Finish -White / Matt Black / Gold  
 Gun Black

### Flare Multi COB



Wattages - 24W / 36W / 48W  
 dimensions - 165X87mm  
 245X87mm  
 165X165mm

### Laser Deep Light



Wattages - 6W / 12W / 18W  
 Color Temp - WW / NW / CW  
 Beam Angle - 45°  
 Cutout- 65X25mm / 125X25mm  
 95mmX95mm  
 Body Color - White / Black

### Laser Tilt Light



Wattages - 6W / 12W / 24W  
 Color Temp - WW / NW / CW  
 Beam Angle - 45°  
 Cutout- 78X43mm / 136X43mm  
 147X49mm  
 Body Color - White / Black

### Laser Focal Light



Wattages - 12W / 20W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36°  
 Cutout - 128X55mm / 205X50mm  
 Body Color - White / Black

### Laser Focal C Light



Wattages - 3W / 6W / 12W / 20W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36°  
 Cutout - 35X35mm / 58X35mm  
 85X35mm / 137X35mm / 237X35mm  
 Body Color - White / Black  
 Finish -White / Black / Rose gold

### Orca COB



Smart control

Wattages - 7W / 12W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36°  
 Cutout - 55X55mm / 75X75mm  
 Height - 52mm / 52mm  
 Body Color - White / Black

### Pin Spot COB



Smart control

Wattages - 7W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36°  
 Dimensions - 38mm X 48mm X 75mm  
 Body Color - White / Black

### Pin Surface COB



Wattages - 7W  
 Color Temp - WW  
 Beam Angle - 36°  
 Dimensions - 35mm X 120mm  
 Body Color - Black / White

### Swan COB



Smart control

Wattages - 12W / 18W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36°  
 Cutout - 75mm / 95mm  
 Body Color - White / Black

### Swan Dual COB



Smart control

Wattages - 14W / 24W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36°  
 Cutout - 126X65mm / 178X88mm  
 Body Color - White / Black  
 OD - 140X93mm / 194X104mm

### Swan Dual SQ COB



Smart control

Wattages - 24W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36°  
 Cutout - 155X80mm  
 Body Color - White / Black  
 OD - 165X90mm

### Slit COB



Wattages - 8W / 12W  
 Color Temp - WW / NW / CW  
 Beam Angle - 30°  
 Cutout - 65mm / 75mm  
 Height - 55mm / 60mm  
 Body Color - White / Black  
 OD - 100mm / 130mm / 150mm

### Multi Downlight



Wattages - 12W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36°  
 Cutout - 75mm  
 Body Color - White  
 Special - 12W COB +12W Downlight  
 Alternate when switching  
 on and off

### Ellipse COB



Wattages - 7W / 12W / 18W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36°  
 Cutout - 55mm / 75mm / 85mm  
 Height - 43mm / 44mm / 51mm  
 Body Color - White / Black / Gold

### Splash COB IP65



Wattages - 12W / 18W / 24W  
 Color Temp - WW / NW / CW  
 Protections - IP65  
 Cutout - 75mm / 95mm / 115mm  
 Height - 54mm / 75mm / 75mm  
 Body Color - White / Black  
 OD - 85mm / 105mm / 130mm

### Kyoto COB



Wattages - 7W / 12W / 18W  
 Color Temp - WW / NW / CW  
 Beam Angle - 45°  
 Cutout - 60mm / 75mm / 88mm  
 Height - 55mm / 60mm / 65mm  
 Body Color - White / Black  
 Finish -White / Matt Black / Gold  
 Shiny Black / Chrome

### Kyoto Surface COB



Wattages - 7W / 12W / 18W  
 Color Temp - WW / NW / CW  
 Beam Angle - 45°  
 Diameter - 55mm / 70mm / 85mm  
 Height - 70mm / 90mm / 100mm  
 Body Color - White / Black  
 Finish -White / Matt Black / Gold  
 Shiny Black / Chrome

### Canary Shine



Wattages - 12W / 18W / 24W  
 Color Temp - WW / NW / CW  
 Beam Angle - 120°  
 Cutout - 90mm / 120mm / 140mm  
 Body Color - White / Black  
 OD - 100mm / 130mm / 150mm  
 Finish-White / Shiny Black / Rose gold

### Pith AL Light



Wattages - 12W / 18W / 24W  
 Color Temp - WW / NW / CW  
 Beam Angle - 120°  
 Diameter - 80mm / 90mm / 128mm  
 Height - 46mm / 48mm / 50mm  
 Body Color - White / Black  
 Material - ADC12

### Pith AL Tall Light



Wattages - 15W / 20W  
 Color Temp - WW / NW / CW  
 Beam Angle - 120°  
 Diameter - 55mm / 85mm  
 Height - 70mm / 72mm  
 Body Color - White / Black  
 Material - ADC12

### Pith PC Light



Wattages - 12W / 18W  
 Color Temp - WW / NW / CW  
 Beam Angle - 120°  
 Dimension- 130mm / 150mm  
 Height - 35mm / 35mm  
 Body Color - White

### Zoom COB



Wattages - 12W / 18W / 30W  
 Color Temp - WW / NW / CW  
 Beam Angle - 36° / 60°  
 Cutout - 75mm / 95mm / 115mm  
 Height - 75mm / 95mm / 115mm  
 Body Color - White  
 OD - 90mm / 115mm / 135mm

### Track Lens COB



Wattages - 20W / 30W  
 Color Temp - WW / NW / CW  
 Beam Angle - 24°  
 Length - 145mm / 150mm  
 Body Color - White / Black

### Focus Wall Light



Wattages - 20W / 30W  
 Color Temp - WW / NW / CW  
 Beam Angle - 24°  
 Dimension- 135mm / 160mm  
 Length - 85mm  
 Body Color - White / Black

### Surface Panel



Wattages - 6W / 12W / 18W / 24W  
 Color Temp - WW / NW / CW  
 Beam Angle - 120°  
 Dimensions - 120mm / 170mm  
 225mm / 300mm  
 Body Color - White

### Slim Panel Light



Wattages - 9W / 15W / 20W  
 Color Temp - WW / NW / CW  
 Beam Angle - 120°  
 Cutout - 100mm / 150mm / 200mm  
 OD - 120mm / 165mm / 225mm  
 Height - 14mm  
 Material - ADC12

### 2X2 Panel Light



Wattages - 36W  
 Color Temp - WW / NW / CW  
 Beam Angle - 120°  
 Dimension- 595mmX595mm  
 Height - 32mm  
 Body Color - White  
 Material - MS

### 1X4 Panel Light




Wattages - 36W  
 Color Temp - WW / NW / CW  
 Beam Angle - 120°  
 Dimension- 1195X295mm  
 Height - 32mm  
 Body Color - White

### Up Down Light 1



Wattages - 14W / 24W  
 Color Temp - WW / NW / CW  
 Dimension - 52X160X82mm  
 Body Color - Black / White / Grey  
 Material - ADC12

### Up Down Light 2



Wattages - 2W / 4W  
 Color Temp - WW  
 Protections - IP54  
 Dimensions - 75mmX75mmX50mm  
 Body Color - Black

### Moss Footlight 1



Wattages - 3W / 6W  
 Color Temp - WW  
 Protections - IP54  
 Dimensions - 85mmX85mmX65mm  
 145mmX85mmX65mm  
 Body Color - Black

### Moss Footlight 2



Wattages - 8W  
 Color Temp - WW  
 Dimensions - 130mm Dia  
 68mm depth  
 Body Color - White / Black / Grey  
 Material - ADC12

### Moss Footlight 3



Wattages - 3W  
 Color Temp - WW  
 Protections - IP54  
 Dimensions - 85mmX85mmX65mm  
 145mmX85mmX65mm  
 Body Color - Black / White

### Up Down Light Multi



Type - 2+2 2 way / 3+3 2 Way  
 Color Temp - WW  
 Protections - IP54  
 Dimensions - 140mmX85mmX40mm  
 180mmX85mmX40mm  
 Body Color - Black

### Up down Light 3



Wattages - 3W / 6W  
 Color Temp - WW  
 Protections - IP54  
 Dimensions - 80mmX80mmX65mm  
 145mmX80mmX65mm  
 Body Color - White / Black

### Up down Light 4



Wattages - 10W  
 Color Temp - WW / NW / CW  
 Beam Angle - 120°  
 Dimension - 120X92X28mm  
 Body Color - Black / White / Grey  
 Material - ADC12

### LED Batten PC



Wattages - 7W / 12W / 18W  
 Color Temp - WW / NW / CW  
 Beam Angle - 120°  
 Height - 75mm / 95mm / 125mm  
 Body Color - White / Black  
 Operation mode - 80% dimming  
 Range of Detention - 8 meter

### Bulk Head PC



EMERGENCY USE  
 Wattages - 12W  
 Color Temp - WW / NW / CW  
 Beam Angle - 120°  
 Dimensions - 183mmX122mmX85mm  
 183mmX90mm  
 Body Color - White

### Wall Washer



Wattages - 18W / 36W / 48W / 72W  
 Length - 0.5M / 1M / 1.2M / 1M  
 Protections - IP65  
 Beam Angle - 15° / 30°  
 Dimensions - 50mmX60mm  
 Body Color - Silver

### Spike COB




Wattages - 4W / 7W / 12W  
 Color Temp - WW  
 Beam Angle - 54°  
 Protections - IP65  
 Body Color - Black

### Staircase Step controller



Input Voltage - 12V / 24V  
 Max Load - 12V - 15W / Step (300W)  
 24V - 20W / Step (400W)  
 No of steps - 32  
 Sensor type - PIR motion (2Pcs)  
 Sensing distance - 0.1 - 2 Meters  
 Size - 185X78X25MM  
 Features - Speed / step control / IC\*  
 IC Note\* - 12V - 150W / running strip  
 24V - 200W / running strip

### Sensors AC



Operation Mode - On / Off  
 Current Rating - 7A 1.5 KVA  
 Holding Time - 8s - 100s  
 Detection Range - 8 Meter

### Moss Burial Light




Wattages - 3W / 6W  
 Color Temp - WW  
 Beam Angle - 30°  
 Cutout - 95mm / 115mm  
 Diameter - 100mm / 120mm  
 Height - 90mm / 90mm


### Smart control




## Silicon Profile

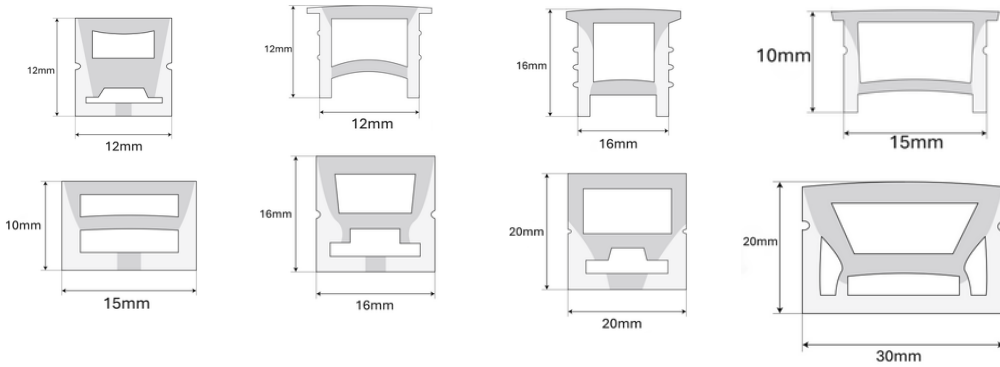

## Silicon Profile Accessories



## Aluminum Profile

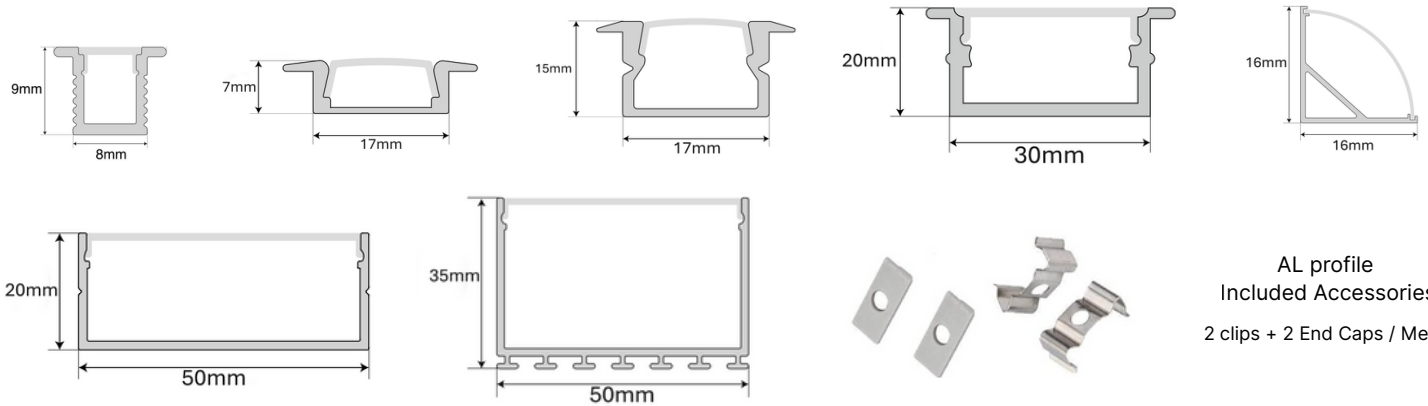

AL profile  
Included Accessories  
2 clips + 2 End Caps / Meter

## Strip Light



IP Strip

LED/Meter - 120 / 180 / 240 - 2835LED  
Wattage Per Meter - 8W / 14W / 18W  
CCT - WW / NW / CW  
Width - 120LED/Meter - 5mm/8mm  
180LED/Meter - 5mm/10mm  
240LED/Meter - 10mm  
Protections - IP65 in 120LED/Meter  
Input Voltage - 12V / 24V  
Dual CCT in 180 LED/Meter

## Rope light



LED/meter - 120LED/Meter  
CCT - WW 2835LED  
Width - 10mm  
Input Voltage - 220V AC

## Running strip



LED/Meter - 126LED/Meter  
CCT - NW / WW 2835LED  
Width - 8mm

## SMPS



Input Voltage - 12V DC

current	Power	Dimensions(mm)
2.5A	30W	90X40X22
5A	60W	114X50X22
10A	120W	138X50X22
12.5A	150W	178X50X22
25A	300W	205X50X22

Isolated  
2Years Warranty

Input Voltage - 24V DC

current	Power	Dimensions(mm)
2.5A	60W	114X50X22
5A	120W	138X50X22
10A	240W	205X50X22
12.5A	300W	205X50X22
16.5A	400W	238X50X22

Isolated  
2Years Warranty

## Ultra Slim Magnetic Track



## Magnetic Track



For More Information .....  
Scan QR





E-catalogue



HQ Location

+91 9352301165

+91 9352301172

+91 9116188568

+91 7976168983

S92 NH8 Madri Udaipur  
Rajasthan India